AIR IS LIFE

AIR IS COMFORT

AIR IS ENERGY

QUALITY AIR FOR LIFE

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of May 2019.
- Due to printing considerations, the actual colours may vary slightly
- All graphics are provided merely for the purpose of illustrating a point.



Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

19RAC0501Z

Panasonic Australia Pty. Limited

1 Innovation Road, Macquarie Park, NSW 2113 ACN 001 592 187 ABN 83 001 592 187 Website: aircon.panasonic.com.au

Do not add or replace refrigerant other than the specified type.

Panasonic Air Conditioning

Authorised Dealer



Air Conditioning Cooling | Heating | Air Purification









OUALITY AIR FOR LIFE We care about the food we eat, and the water that we drink; but what about the air

Indoor Air Quality (IAQ) is an increasingly prevalent concern in a world faced with rising levels of pollution, temperatures and climate change. At Panasonic, we're committed to delivering more than just cooling and heating solutions, we consistently strive to help you make positive choices, bringing you Quality Air, for Life.

18 We breathe in AlR a person a day

FOOD

1.3kg

a person
a day

WATER

1.2kg

a person
a day





Quality Air for Life

The Panasonic nanoe™ X utilises next gen technology to remove dust, inhibit the growth of bacteria, mould and viruses, and deodorise, ensuring quality air, for life.

Please refer to pages 8 & 9 for more details.





Market Leading Connectivity

Control your air in more ways with Panasonic air conditioning's market leading connectivity; now Google Assistant and Amazon Alexa compatible*.

Refer to page 11 for terms and conditions.

*Time of release Quarter 3 2019. Google is a trademark of Google LLC.
Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc.
or its affiliates.



Complete Air Purification

Purify your air 24 hours a day at only 35W/Hour *. Whether you're at home or away, nanoeTM X leaves you with cleaner and more comfortable spaces.

* Energy consumption may vary depending on models.



AEROWINGS





Control, Comfort & Reassurance


Featuring leading technologies that provide shower/fast cooling, quiet operation and energy efficiency; your control, comfort, and reassurance are accounted for.

Awareness of **Indoor Air Quality**

Clean air is essential to fostering and maintaining a healthy lifestyle; though there is little awareness of the invisible issues within IAQ. Australians spend 90%* or more of their time indoors. Increasingly, as our homes and living/working spaces have become better sealed from the external environment, pollutants from indoor sources (e.g. gas cookers, heaters, wood fires, mould, pollen, etc.) are being found at higher concentrations. Panasonic works to improve your IAQ by removing/reducing those invisible issues, bringing you peace of mind in the quality of your air.

*According to the Australian Government, Department of Environment & Energy (2019) https://www.environment.gov.au/protection/air-quality/indoor-air

Invisible issues with indoor air environments

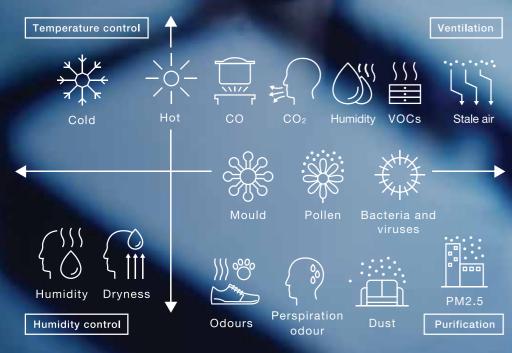



PM2.5: refers to atmospheric particulate matter (PM) that have a diameter of less than 2.5 micrometers (approximately 3% the diameter of a human hair). Due to their size, fine particles tend to stay longer in the air than heavier particles; this increases the chance of inhalation. These particles are able to bypass the nose and throat and penetrate deep into the lungs and some may even enter the circulatory system, having an adverse effect on ones health https://www.health.nsw.gov.au/environment/air/Pages/particulate-matter.aspx


Living Room

Hot air tends to stagnate in closed spaces. Consequently, indoor temperatures and humidity increase. Conditions also worsen the more people there are within the room.

Pollutants are present at higher concentrations towards the floor. As such, children are at a higher risk of constant contact.








Bedroom

The bedroom is where we spend a majority of our time at home; the average Australian spending 8 hours or more here.

Study

Concentration is affected by loud operating noises.

Moreover, smaller spaces have a tendency of feeling colder.









The 7 benefits of •nance×







2 Inhibition of Bacteria & Viruses nanoe™ X envelops and inhibits the activity of airborne and adhered Bacteria & Viruses.



3 Inhibition of Mould growth
Common airborne and adhered mould found inside
living/working spaces are enveloped and inhibited
by nanoe™ X.



Inhibition of major Allergens
In addition to allergens from sources such as dog/cat
dander, mite faeces/carcasses, and airborne mould,
other major allergens are inhibited by nanoe™ X.



5 Inhibition of Pollen nanoe™ X is effective in inhibiting a variety of pollens globally, all year around. The inhibition effect has been confirmed on a number of common species found internationally.



Breakdown of Hazardous Substances nanoe™ X has been confirmed to inhibit and breakdown common hazardous/harmful substances found in PM2.5, ensuring that the air you breathe is cleaner and safer.



Hydrates and Moisturises
nanoe™ X combines with natural sebum (natural
skin oils) to coat the skin, leading to a smoother,
well-hydrated complexion.

8

A Smarter Way to

Control Your Air

The Panasonic Comfort Cloud App & WLAN Smart Adaptor deliver convenient control, connectivity and comfort. Seamlessly adjust temperature, monitor energy consumption, change modes, etc. all from just one mobile device*.

Now Google Assistant and Amazon Alexa Compatible*.



SMART Control Control, monitor & analyse up to 200 units in multiple locations from just one device.



SMART Comfort Control your comfort 24 hours a day with remote AC access features, air purification functionality and much more.



SMART Efficiency Analyse and compare energy consumption, improving energy efficiency and cost effectiveness.



SMART Assist Monitor & manage air conditioner troubleshooting effortlessly whilst assigning user control permissions.



Intuitive Voice Control

Introducing intuitive voice control with Google Assistant and Amazon Alexa control compatibility*. Using your existing Google assistant or Alexa devices, control your air conditioner with just your voice.

*CZ-TACG1 & updated firmware required.

Compatible Device and Browsers

1. iOS 9.0 or above 2. Android 4.4 or above





Please note: This is not a definitive list of all compatible devices, other similar devices which use supported Operating Systems should also work either via dedicated Apps. Please note that user experience may vary slightly depending on hardware and software combination.



- * CZ-TACG1 WLAN Adaptor required per unit. Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available. * To use Amazon Alexa to control your air conditioner, you will need an Amazon Echo device. * To use Google Assistant to control your air conditioner, you will need an Google Assistant device. * Time of release Quarter 3 2019. Google is a trademark of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com,Inc. or its affiliates. * Wirreless LAN Remote Control for Internet Connection required optional network adaptor. * Indoor temperature display and some special function are not available through the App for all models. * Indoor image displayed may not match with actual unit.

Complete Air Purification - Purifies Your Air Wherever You Are



Purifies When You're Away


Step 1: Turn ON your air conditioner with Panasonic's Comfort Cloud App

Step 2: Select nanoe™ mode from 'Mode Selection'. nanoe™ mode is displayed on screen.



Purifies When You're At Home





^{*1} CZ-TACG1 WLAN Adaptor and internet connection required for operation. 1 Functionality may vary by model

WALL-MOUNTED: AERO SERIES PREMIUM REVERSE CYCLE INVERTER Single -Split Type



CS-Z25VKR | CS-Z35VKR | CS-Z42VKR



CS-Z50VKR | CS-Z60VKR | CS-Z71VKR | CS-Z80VKR



755 mm

Person

Wireless

Wireless Remote









Remote Controller

CZ-RD514C Wired Remoted Controller (Optional)

Wired Remoted

Controller Controller (Optional)

CZ-TACG1 Network Adaptor*1 (Optional)

Cooling (): Outdoor Unit EER : Cooling Efficiency
Heating COP: Heating Efficiency

SPECIFICATIONS

MODEL		(240V / 1 Phase / 50Hz)		CS-Z25VKR	CS-Z35VKR	CS-Z42VKR	CS-Z50VKR	CS-Z60VKR	CS-Z71VKR	CS-Z80VKR
				[CU-Z25VKR]	[CU-Z35VKR]	[CU-Z42VKR]	[CU-Z50VKR]	[CU-Z60VKR]	[CU-Z71VKR]	[CU-Z80VKR]
Cooling / Heating Capacity		(min-max)	kW	2.50 [0.90-3.00] 3.20 [0.90-5.00]	3.50 [0.90-4.00] 4.30 [0.90-5.80]	4.20 [0.90-5.00] 5.10 [0.90-7.10]	5.00 [0.95-6.00] 6.00 [1.05-8.00]	6.00 [1.70-7.10] 7.20 [1.70-8.50]	7.10 [1.70-8.10] 8.00 [1.70-9.90]	8.00 [2.30-9.00] 9.00 [2.20-11.00]
		(min-max)	Btu/h	8,530 [3,070-10,200] 10,900 [3,070-17,100]	11,900 [3,070-13,600] 14,700 [3,070-19,800]	14,300 [3,070-17,100] 17,400 [3,070-24,200]	17,100 [3,240-20,500] 20,500 [3,580-27,300]	20,500 [5,800-24,200] 24,600 [5,800-29,000]	24,200 [5,800-27,600] 27,300 [5,800-33,800]	27,300 [7,840-30,700] 30,700 [7,500-37,500]
Air Flow		Indoor	L/s	193/203	207/220	222/222	328/332	332/340	355/362	370/370
Dehumidification			L/h	1.5	2.0	2.4	2.8	3.3	4.1	4.7
Electrical Data		Running Current	А	2.30/2.90	3.75/4.40	4.70/5.90	5.10/5.80	7.00/7.80	8.60/9.20	10.90/11.30
		Power Input (min-max)	kW	0.50 (0.18~0.75) 0.62 (0.17-1.30)	0.80 (0.20-1.06) 0.94 (0.18-1.56)	1.07 (0.22-1.60) 1.34 (0.23-2.25)	1.13 (0.21-2.05) 1.31 (0.23-2.65)	1.58 (0.44-2.20) 1.78 (0.40-2.50)	1.97 (0.44-2.48) 2.11 (0.40-3.00)	2.32 (0.46-2.82) 2.41 (0.50-3.30)
AEER / EER ACOP / COP			W/W W/W	4.87/5.00 5.06/5.16	4.31/4.38 4.51/4.57	3.88/3.93 3.77/3.81	4.38/4.42 4.54/4.58	3.77/3.80 4.02/4.04	3.58/3.60 3.77/3.79	3.43/3.45 3.72/3.73
Star Rating		5.0 5.5	4.0 4.5	3.0 3.0	4.0 4.5	3.0 3.5	2.5 3.0	2.0 2.5		
Sound Press		Indoor (H / I	L/Q-Lo)	43/25/19 42/27/21	44/26/19 46/29/21	47/30/23 46/31/27	47/34/31 45/33/29	47/36/33 47/35/32	49/37/34 49/37/34	51/38/35 50/38/35
Level*	.evel*2dB(A)			47/- <mark>47/</mark> -	49/- 50/-	47/42 47/42	48/43 48/43	53/48 53/48	54/49 54/49	55/50 55/50
	Sound Power	Indoor (H / I	L/Q-Lo)	59/41/35 58/43/37	60/42/35 62/45/37	63/46/39 62/47/43	63/50/47 61/49/45	63/52/49 63/51/48	65/53/50 65/53/50	67/54/51 66/54/51
		Outdoor (F	H/Q-Lo)	62/- 62/-	64/- 65/-	62/57 62/57	62/57 62/57	67/62 67/62	68/63 68/63	69/64 69/64
Net Weight		Indoor (Outdoor)	kg	10(31)	10(31)	10(43)	13(44)	13(50)	13(50)	13(60)
Dimen	sions	Indoor (H x W x D) Outdoor (H x W x D)	mm mm	295 x 919 x 194 542 x 780 x 289	295 x 919 x 194 542 x 780 x 289	295 x 919 x 194 695 x 875 x 320	302 x 1,120 x 236 695 x 875 x 320	302 x 1,120 x 236 695 x 875 x 320	302 x 1,120 x 236 695 x 875 x320	302 x 1,120 x 236 795 x 875 x 320
Refrigerator Pipe Diameter		Liquid Side m	ım/(inch)	ø 6.35 [1/4]	ø 6.35 [1/4]	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 [1/4]	ø 6.35 [1/4]	ø 6.35 [1/4]
		Gas Side m	ım/(inch)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 12.70 (1/2)	ø 12.70 (1/2)	ø 12.70 (1/2)	ø 15.88 (5/8)	ø 15.88 (5/8)
Pipe Extension Length min-max (m)		3~20	3~20	3~30	3~30	3~30	3-30	3~30		
Maximum Elevation Length m		15	15	15	15	15	20	20		
Pipe Length For Additional Gas m			7.5	7.5	7.5	10	10	10	10	
Additional Gas Amount			g/m	10	10	15	15	15	25	25
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	
Operating Range (Outdoor) Cooling Heating Degree °C			+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24	+5 - +46 -15 - +24	
Refrigerant Type			R32	R32	R32	R32	R32	R32	R32	

 $^{^{*1}}$ Indoor temperature display and some special function are not available through the App for all models.

SPECIFICATIONS & FEATURES

 $Products\ in\ this\ brochure\ contain\ R32\ refrigerant.\ Please\ refer\ to\ Panasonic's\ installation\ instructions$ and service manuals before installation and servicing this product.

Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so.

The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty and service is required.

Future improvement, specifications, designs of product and availability are subject to change without notice. Please check with your dealer.

ALL CAPACITY AND ENERGY EFFICIENCY RATINGS ARE BASED ON AS/NZS3823.1.1

COOLING	Indoor temperature Outdoor temperature	27°C DB/19°C WB 35°C DB		
HEATING	Indoor temperature Outdoor temperature	20°C DB 7°C DB / 6°C WB		
Running current	is at rated conditions (AS3823) and	d does not include compressor		

start-up or variations in power supply and load conditions.

FEATURES EXPLANATION

INVERTER CONTROL

Varies the rotation speed of the completing higher energy savings.



ECO MODE

More energy saving compared to the normal mode by automatically adjusting the set temperature by up to 2°C. It's ideal when you cooling and heating.



iAUTO-X

Come home to ultra-fast cooling, and then enjoy continuous comfort Shower Cooling that evenly



FAN MODE

QUIET MODE

Enjoy the comfort of running your air conditioner at night and still have a relaxing sleep.

Allows you to run the fan without any cooling or

heating, thus giving just ventilation



PERSONAL AIRFLOW CREATION

AUTO CHANGEOVER (INVERTER)

In Auto Mode the unit will select if heating or

Vertical and horizontal airflow patterns can be



MILD DRY COOLING

POWERFUL MODE

Fine control helps prevent a rapid decrease in room humidity while maintaining the set



SOFT DRY OPERATION MODE

(<u>P</u>g Pressing the Powerful button cools or heats the room quickly. It provides fast comfort, with full power and a strong airflow. This is perfect for use immediately after coming home, or when unexpected guests arrive. Starts with cooling to dehumidify, then provides continuous breeze at a low frequency to keep a room dry without much change to the



FAN MODE

HOT START CONTROL

On the start of the heating cycle and after the defrost cycle, the indoor fan will start up once the indoor heat exchanger is warm.



\$--0--\h

CLEAN & HEALTHY AIR

nanoe™ X

nanoe™ X deodorises and inhibits the growth of bacteria and viruses, for a fresher and cleaner living space.



ODOUR-REMOVING FUNCTION

With this function, there's no unpleasant odor when the unit starts up. That's because the fan remains off momentarily, while the source of the odour inside the air conditioner is suppressed.

The unit must be in cool or dry mode and the fan



REMOVABLE, WASHABLE PANEL

Gives you easy access to the filter as well making



CONVENIENCE

24-HOUR DUAL ON & OFF REAL SETTING TIMER

This feature enables you to preset two different sets of start/stop operation timer (hour and minute) within a 24-hour time frame.

DEMAND RESPONSE ENABLING

power supply to the units if connected.

Allows Electrical Utility Companies to regulate the



Dual 24

3RD PARTY CONNECTIVITY





WIRED REMOTE CONTROL (OPTIONAL)




DRED

LCD WIRELESS REMOTE CONTROL Easy control of the unit from anywhere in the roor



WLAN REMOTE CONTROL & VOICE CONTROL (OPTIONAL)





RELIABILITY

BLUE FIN CONDENSER

DEVICE (DRED)

Extra protection from the elements with a longer lasting coil.



LONG PIPING

Long piping offers more flexible installation options.

*20m - CS-Z25VKR, CS-Z35VKR
*30m - CS-Z42VKR, CS-Z50VKR, CS-Z60VKR, CS-Z71VKR, CS-Z80VKR



SELF-DIAGNOSTIC FUNCTION Should a malfunction occur, the unit diagnoses the problem and shows the corresponding alphanumeric code. This allows for quicker servicing.



RANDOM AUTO RESTART

When multiple units are connected and there is a power outage, they will turn on at different times in order to not spike the power supply.



Ŏ

TOP-PANEL MAINTENANCE ACCESS Easy access for maintenance.







OUTDOOR







CU-Z35VKR



CU-Z71VKR

CU-Z50VKR CU-Z60VKR

CU-Z80VKR



 $^{^{\}rm *2}$ Sound pressure level specification is measured according to JIS C9612.